



ECM Surface Mount Oscillator

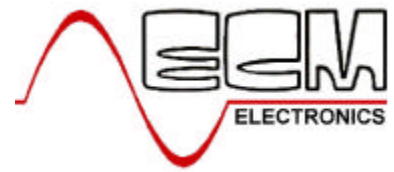


Valpey Fisher VF3

- Wide Frequency Range
- Miniature Ceramic Package
- SMD Tri-state Oscillator
- Industrial Temperature Range Available

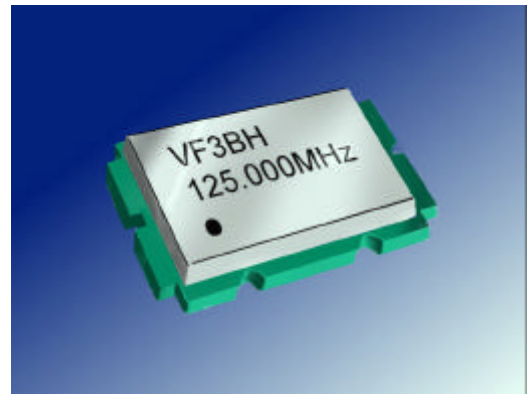

Parameter	VF3	
Frequency Range	1.8Mhz to 125.0MHz	
Frequency Stability	+/-20, +/-25, +/-50ppm to 50MHz 100ppm over 70MHz	Specify
Supply Voltage	3.3V	
Supply Current	10mA to 25.0MHz 15mA to 50.0MHz 18mA to 67.0MHz 28mA to 125.0MHz	15pf Load
Load	10LS-TTL or 15pF	
Duty Cycle	45/55 to 50.0MHz 40/60 over 50.0MHz	
Rise & Fall Times	10nS max	5ns Typ
Logic "1" Level	0.9Vcc min	
Logic "0" Level	0.1Vcc max	
Enable Input	Input High (>2.5V) or floating ACTIVE	
Disable Input	Input LOW (<0.5V) INFINITE IMPEDENCE	
Start-up Time	10mS max	3mS Typ
Enable Disable Time	100nS	
Operating Temp	-10 ⁰ C to +70 ⁰ C (-45 ⁰ to +85 ⁰ C) Available	

Environmental & Mechanical	
Mechanical Shock	Mil STD 202 Method 213 Cond E
Thermal Shock	Mil STD 883 Method 1011 Cond A
Vibration	MIL-STD-883 Method 2007 Cond A
Soldering Condition	260 ⁰ C for 10s max: 230 ⁰ C for 90s max
Hermetic Seal	Leak rate less than 5x10 ⁻⁸ Atm.cc/s of helium

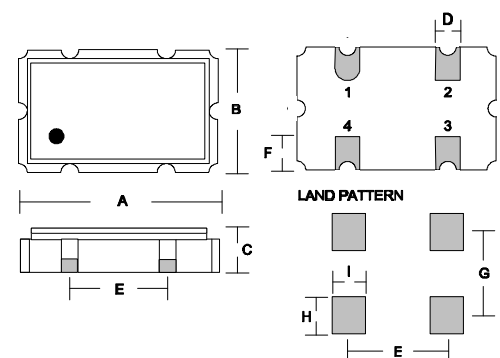

Part Numbering: VF3 B H 1 125.00M

Series _____

Stability _____

S= 20ppm A= 25ppm

B= 50ppm Blank = 100ppm

Symmetry _____

H= 45/55 Blank= 40/60

Temperature Range _____

Blank= 0⁰C to +70⁰C

1= -40⁰C to +85⁰C

Frequency _____

Pin	1	2	3	4
Function	Tristate	GND	O/P	Vcc

A	B	C	D	E	F	G	H
7.50	5.00	2.00	1.39	5.07	1.39	3.98	1.39

Dimensions in mm

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

Issue 1